


NOTE: THIS DRAWING WAS PRODUCED BY COMPUTER, DO NOT UPDATE MANUALLY

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
A0	—	新版发行	林飞	2017. 10. 11

The drawing and specification is the property of ALINTA ELECTRONICS CO., LTD. And shall not be reproduced, copied or used in any manner without the prior written consent of ours.

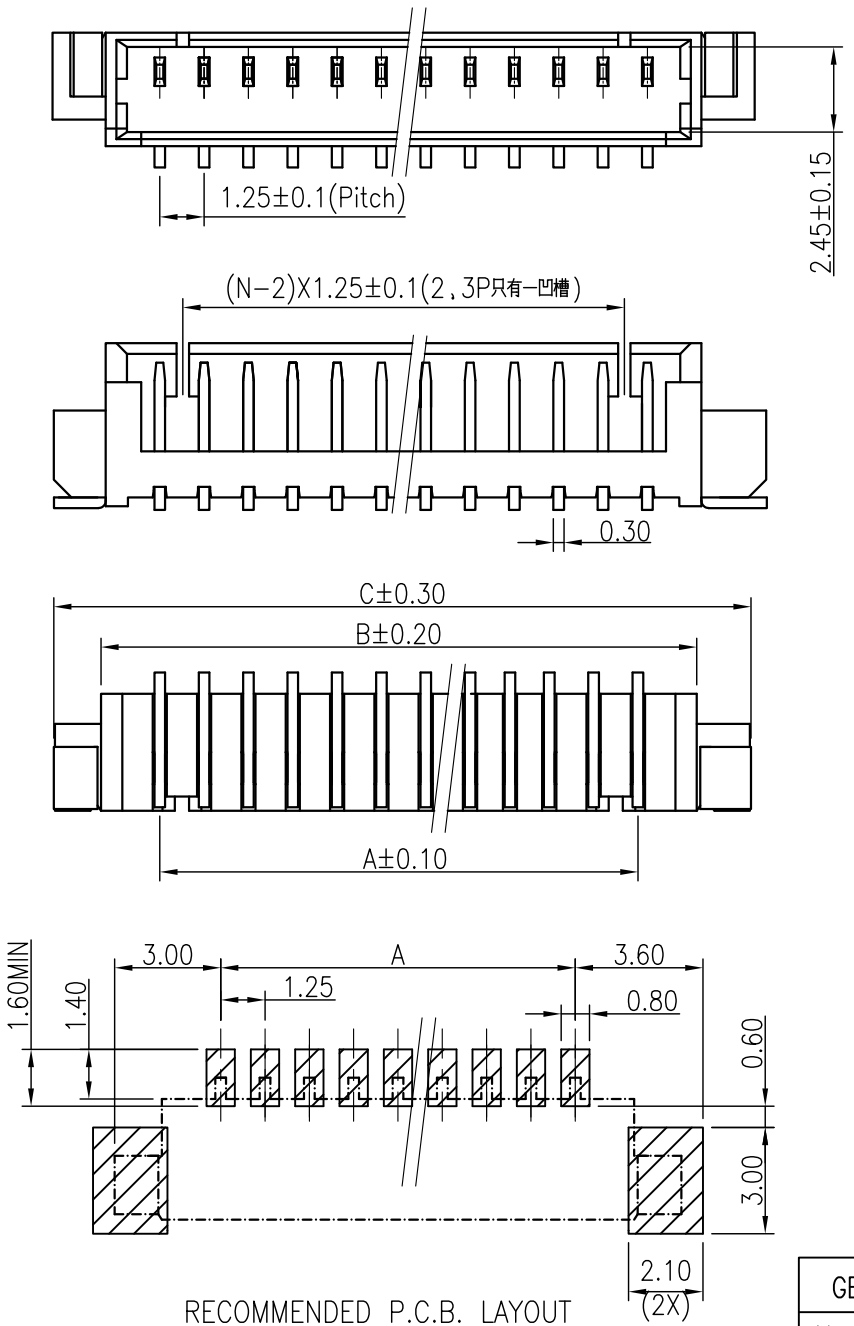

RECOMMENDED P.C.B. LAYOUT
General Tolerance: ±0.05

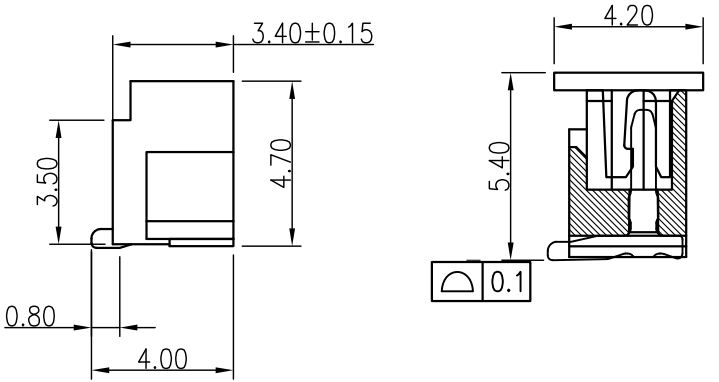


TABLE:

尺寸 孔位	DIM. A	DIM. B	DIM. C
2P	1.25	4.25	7.30
3P	2.50	5.50	8.55
4P	3.75	6.75	9.80
5P	5.00	8.00	11.05
6P	6.25	9.25	12.30
7P	7.50	10.50	13.55
8P	8.75	11.75	14.80
9P	10.00	13.00	16.05
10P	11.25	14.25	17.30
11P	12.50	15.50	18.55
12P	13.75	16.75	19.80
13P	15.00	18.00	21.05
14P	16.25	19.25	22.30
15P	17.50	20.50	23.55
16P	18.75	21.75	24.80

Part Number:
TJ-JS-22-XX SN988-R

Poles: 02~16

主要技术参数 Main Specifications
 线数 (Poles): 02 to 16
 接触电阻 (Contact Resistance): ≤30mΩ
 绝缘电阻 (Insulation Resistance): ≥100MΩ
 额定电压 (Rated Voltage): 125V AC DC
 额定电流 (Rated Current): 1.0A AC DC
 耐电压 (Withstand Voltage) 500V AC/Minute
 温度范围 (Temperature Range): -20°C ~ +70°C

C	SOLDER TAB	2 PCS	Brass	Sn-plated
B	CONTACT	02~16PCS	Brass	Sn-plated
A	PEDESTAL	1 PCS	LCP	UL 94V-0, COLOR:BEIGE
TEM	COMPONENT	Q'TY	MATERIAL	FINISH

GENERAL TOLERANCE		日期	2017. 10. 11	UNITS	SCALE
X.	±0.50	X'.	±5°	mm	1:1
.X	±0.30	.X'	±2°	REV.	SHEET
.XX	±0.25	.XX'	±1°	A0	1/1
		审核		SIZE	C
		制图	林飞	A4	

ALINTA
Alinta Electronics Co., Ltd.

品名: A1251-SMT-nA立贴针座加盖系列
料号: SEE TABLE 图号: DWG-TJ-988